


# 牙口式彈簧型逆止閥 SWIVEL TYOE CHECK VALVE

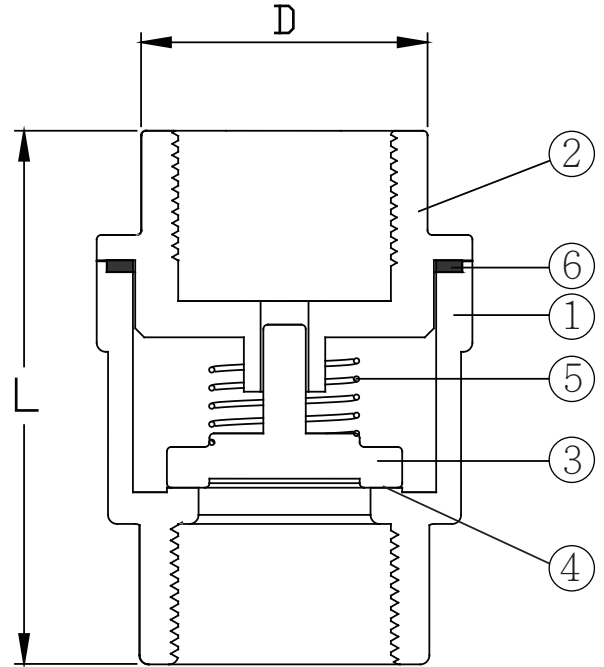

最高使用壓力 : 16kg/cm<sup>2</sup>  
最高使用溫度 : 300 °C  
最低動作壓力 : 0.05kg/cm<sup>2</sup>

## MATERIALS

| ITEM NO | PART NAME | MATERIAL |
|---------|-----------|----------|
| 1       | BODY      | CF8 CF8M |
| 2       | CAP       | CF8 CF8M |
| 3       | DISC      | CF8 CF8M |
| 4       | SEAT      | CF8 CF8M |
| 5       | SPRING    | SUS316   |
| 6       | PARKING   | PTFE     |

(FOR REFERENCE ONLY.)

## DIMENSIONS

| SIZE | 1/4" | 3/8" | 1/2" | 3/4" | 1"  | 1-1/4" | 1-1/2" | 2"  |
|------|------|------|------|------|-----|--------|--------|-----|
| D    | 19   | 23   | 26   | 32   | 39  | 50     | 57     | 70  |
| L    | 40   | 40   | 55   | 60   | 70  | 80     | 85     | 100 |
| KG   | .10  | .14  | .15  | .27  | .41 | .86    | 1.1    | 1.8 |

(FOR REFERENCE ONLY.)